

Asymptotic analysis of 3D dynamic equations in linear elasticity for a thin layer resting on a Winkler foundation

BARIŞ ERBAŞ*

Department of Mathematics, Eskişehir Technical University, 26470, Eskişehir, Turkey
Corresponding author: berbas@eskisehir.edu.tr

JULIUS KAPLUNOV

School of Computing and Mathematics, Keele University, ST5 5BG, UK

AND

GÖKÇE KILIÇ

Department of Mathematics, Eskişehir Technical University, 26470, Eskişehir, Turkey

[Received on 9 July 2022]

A 3D dynamic problem for a thin elastic layer resting on a Winkler foundation is considered. The stiffness of the layer is assumed to be much greater than that of the foundation in order to allow low-frequency bending motion. The leading long-wave approximation valid outside the vicinity of the cut-off frequency is derived. It is identical to the classical Kirchhoff plate theory. A novel near cut-off 2D approximation is also established. It involves both bending and extension motions which are not separated from each other due to the effect of the foundation. The associated dispersion relation appears to be nonuniform over the small wavenumber domain.

Keywords: low-frequency, long-wave, cut-off, asymptotic, Winkler, elastic, plate.

1. Introduction

Dynamic and static analysis of thin plates and beams resting on an elastic foundation is a major domain in structural mechanics since long ago, e.g., see general reference works Wang et al. (2005), Dillard et al. (2018), Younesian et al. (2019) and also journal papers Tanahashi (2004), Metrikine (2004), Dumir (1988), Chien & Chen (2006), Zhang & Liu (2019), Auersch (2008), Chen & Chen (2011), Froio et al. (2018), Ghannadial & Mofid (2015) to name but a few.

Recently, ad hoc approximations broadly accepted by the interdisciplinary audience started to find mathematical justification. In particular, it was shown that the famous Winkler model, Winkler (1867), see also the historical survey in Kuznetsov (1952), coincide with a leading order behaviour of a thin elastic layer interacting with a stiff environment along one of its faces, Kaplunov et al. (2018), Aghalovyan (2015), Kudish et al. (2021).

Strictly speaking, the well-known asymptotic results for thin elastic structures with traction-free or loaded faces, e.g., see books by Goldenveizer (1976), Kossovich (1986), Ciarlet (1990), Kaplunov et al. (1998), Le (2012), cannot immediately be extended to the case of mixed boundary conditions along the faces. The reason is that the latter is not governed by Neumann type boundary conditions due to the presence of a foundation. To the best of our knowledge, the only effort of justifying an ad hoc model of an elastically supported beam model using asymptotic analysis of a 2D plane stress formulation was reported in Erbaş et al. (2021). The cited paper implements the scaling corresponding

to bending vibrations of a layer with traction-free faces, e.g., see Kaplunov et al. (1998). Both leading and first order approximations were derived. The former is identical to the classical Euler-Bernoulli theory adapted for a beam lying on a Winkler foundation.

In what follows, we consider a 3D dynamic problem in linear elasticity for a thin layer supported by a Winkler foundation. Long-wave low-frequency motion is analysed under the assumption that the stiffness of the layer is much greater than that of the foundation. As might be expected, the leading order approximation generally coincides with the Kirchhoff equation governing bending vibrations of a plate resting on a Winkler foundation. The exception is a narrow vicinity of the associated cut-off frequency where the asymptotic scaling underlying plate bending deformation is violated. Similar situation occurs for a thin cylindrical shell, for which the low-frequency near cut-off behaviour assumes a special treatment, see Strozzi et al. (2014), Kaplunov & Nobili (2017), Kaplunov et al. (2016).

The near cut-off 2D approximation derived in the paper takes a rather sophisticated form and does not allow simple separation of bending and extension deformations due to asymmetry caused by the effect of foundation. The asymptotic behaviour of the related dispersion relation appears to be nonuniform near the cut-off frequency because of veering of bending and extension dispersion curves earlier noted in Erbaş et al. (2018). This is not usually the feature of the dispersion relations for thin structures with traction-free faces, Kaplunov et al. (1998).

The paper is organized as follows: the studied 3D problem is formulated in Section 2. The leading order approximation for plate bending vibration is derived in Section 3. The near cut-off degeneration of the asymptotic scaling related to plate bending and the derivation of an alternative low-frequency approximation is addressed in Section 4 which is central to the paper. The developed near cut-off model is discussed in greater detail in Section 5.

2. Statement of the Problem

Consider an infinite elastic layer of thickness $2h$ supported by a Winkler foundation of stiffness θ along its lower surface and subject to a vertical load P along the upper one, see Figure 1. Denote Young's modulus, Poisson's ratio, mass density of the elastic material by E , ν and ρ , respectively.

Let the layer motion in the cartesian coordinates $-\infty < \alpha_1, \alpha_2 < \infty$, $-h \leq \alpha_3 \leq h$ be governed by the 3D equations in linear elasticity given by

$$\frac{\partial \sigma_{3i}}{\partial \alpha_3} + \frac{\partial \sigma_{ii}}{\partial \alpha_i} + \frac{\partial \sigma_{ji}}{\partial \alpha_j} - \rho \frac{\partial^2 v_i}{\partial t^2} = 0, \quad (2.1)$$

$$\frac{\partial \sigma_{33}}{\partial \alpha_3} + \frac{\partial \sigma_{31}}{\partial \alpha_1} + \frac{\partial \sigma_{32}}{\partial \alpha_2} - \rho \frac{\partial^2 v_3}{\partial t^2} = 0, \quad (2.2)$$

with

$$\sigma_{ii} = \frac{E}{1-\nu^2} \left(\frac{\partial v_i}{\partial \alpha_i} + \nu \frac{\partial v_j}{\partial \alpha_j} \right) + \frac{\nu}{1-\nu} \sigma_{33}, \quad (2.3)$$

$$\sigma_{ij} = \frac{E}{2(1+\nu)} \left(\frac{\partial v_i}{\partial \alpha_j} + \frac{\partial v_j}{\partial \alpha_i} \right), \quad (2.4)$$

$$\sigma_{3i} = \frac{E}{2(1+\nu)} \left(\frac{\partial v_3}{\partial \alpha_i} + \frac{\partial v_i}{\partial \alpha_3} \right), \quad (2.5)$$

$$E \frac{\partial v_3}{\partial \alpha_3} = \sigma_{33} - \nu(\sigma_{11} + \sigma_{22}) \quad (2.6)$$

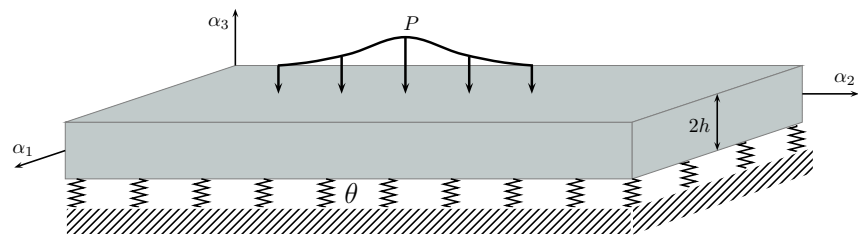


FIG. 1. An elastic layer on a Winkler foundation.

where σ_{kl} , $k, l = 1, 2, 3$ are stresses, v_m , $m = 1, 2, 3$ are displacements, t is time; throughout the paper, we also consider $i \neq j = 1, 2$.

The boundary conditions along the faces of the layer are written as

$$\sigma_{3i} \Big|_{\alpha_3 = \pm h} = 0, \quad i = 1, 2 \quad (2.7)$$

$$\sigma_{33} \Big|_{\alpha_3 = h} = P, \quad \sigma_{33} \Big|_{\alpha_3 = -h} = \theta v_3. \quad (2.8)$$

We assume that the stiffness of the layer is much greater than that of the Winkler foundation such that

$$\varepsilon = \sqrt{\frac{2(1+\nu)\theta h}{E}} \ll 1 \quad (2.9)$$

is a small parameter. The latter condition supports long-wave, low-frequency bending vibrations of a layer, see the plane strain analysis in Erbaş et al. (2021) and references therein. For these vibrations typical wavelength L and time scale T may be defined as

$$L \sim \frac{h}{\sqrt{\varepsilon}}, \quad T \sim \frac{h}{c_2 \varepsilon} \quad (2.10)$$

implying that $(L/h)^2 \sim T c_2 / h$. The standard in the plate theory, scaling (2.10) (see, also Kaplunov et al. (1998) for greater detail), is adopted below for the derivation of the well-known 2D equations governing Kirchhoff plate motion supported by a Winkler foundation. It is demonstrated in the paper that the aforementioned scaling is not valid near the cut-off frequency of a bending wave. An alternative scaling specifically oriented to near cut-off behaviour is, then, introduced.

3. Conventional 2D plate model

Let us derive the leading order 2D equations of bending motion starting from 3D relations above. First, according to the scaling (2.10), specify the dimensionless coordinates by

$$\alpha_i = \frac{h}{\sqrt{\varepsilon}} \xi_i, \quad \alpha_3 = h \zeta, \quad t = \frac{h}{c_2 \varepsilon} \tau. \quad (3.1)$$

Also, scale the displacements, stresses and the prescribed load by

$$v_i = \sqrt{\varepsilon} h v_i^*, \quad v_3 = h v_3^*, \quad (3.2)$$

$$\sigma_{ii} = E \varepsilon \sigma_{ii}^*, \quad \sigma_{ij} = E \varepsilon \sigma_{ij}^*, \quad \sigma_{3i} = E \varepsilon^{3/2} \sigma_{3i}^*, \quad \sigma_{33} = E \varepsilon^2 \sigma_{33}^*, \quad (3.3)$$

and

$$P = E \varepsilon^2 P^*. \quad (3.4)$$

Remark that the last set of formulae is identical to that for dynamic bending of a plate in the absence of a foundation, e.g., see, Kaplunov et al. (1998).

In dimensionless variables (3.1), the equations of motion in the previous section, rewritten through the starred quantities defined by (3.2)–(3.3), become

$$\frac{\partial \sigma_{3i}^*}{\partial \zeta} = - \left(\frac{\partial \sigma_{ii}^*}{\partial \xi_i} + \frac{\partial \sigma_{ij}^*}{\partial \xi_j} \right) + \frac{\varepsilon}{2(1+\nu)} \frac{\partial^2 v_i^*}{\partial \tau^2} \quad (3.5)$$

$$\frac{\partial \sigma_{33}^*}{\partial \zeta} = - \left(\frac{\partial \sigma_{3i}^*}{\partial \xi_i} + \frac{\partial \sigma_{3j}^*}{\partial \xi_j} \right) + \frac{1}{2(1+\nu)} \frac{\partial^2 v_3^*}{\partial \tau^2} \quad (3.6)$$

with

$$\sigma_{ii}^* = \frac{1}{1-\nu^2} \left(\frac{\partial v_i^*}{\partial \xi_i} + \nu \frac{\partial v_j^*}{\partial \xi_j} \right) + \varepsilon \frac{\nu}{1-\nu} \sigma_{33}^* \quad (3.7)$$

$$\sigma_{ij}^* = \frac{1}{2(1+\nu)} \left(\frac{\partial v_i^*}{\partial \xi_j} + \frac{\partial v_j^*}{\partial \xi_i} \right), \quad (3.8)$$

$$\frac{\partial v_i^*}{\partial \zeta} = - \frac{\partial v_3^*}{\partial \xi_i} + 2\varepsilon(1+\nu)\sigma_{3i}^*, \quad (3.9)$$

$$\frac{\partial v_3^*}{\partial \zeta} = \varepsilon^2 \sigma_{33}^* - \varepsilon \nu (\sigma_{ii}^* + \sigma_{jj}^*). \quad (3.10)$$

The boundary conditions are, now, written as

$$\sigma_{3i}^* \Big|_{\zeta=\pm 1} = 0, \quad (3.11)$$

$$\sigma_{33}^* \Big|_{\zeta=1} = \varepsilon^2 P^*, \quad \sigma_{33}^* \Big|_{\zeta=-1} = \frac{1}{2(1+\nu)} v_3^*. \quad (3.12)$$

The starred quantities may now be expanded in an asymptotic series as

$$f^* = f^{(0)} + \varepsilon f^{(1)} + \varepsilon^2 f^{(2)} + \dots \quad (3.13)$$

First, we derive from formula (3.10), at leading order,

$$v_3^{(0)} = V_3^{(0)}(\xi_i, \tau). \quad (3.14)$$

Then, substituting (3.14) into (3.9), we obtain, integrating in ζ ,

$$v_i^{(0)} = -\zeta \frac{\partial V_3^{(0)}}{\partial \xi_i} + V_i^{(0)}. \quad (3.15)$$

Now, continue with the leading order terms for the stress components σ_{ii} and σ_{ij} . On inserting (3.15) into (3.7) and (3.8) we have, respectively,

$$\sigma_{ii}^{(0)} = -\frac{\zeta}{1-\nu^2} \left(\frac{\partial^2 V_3^{(0)}}{\partial \xi_i^2} + \nu \frac{\partial^2 V_3^{(0)}}{\partial \xi_j^2} \right) + \frac{1}{1-\nu^2} \left(\frac{\partial V_i^{(0)}}{\partial \xi_i} + \nu \frac{\partial V_j^{(0)}}{\partial \xi_j} \right), \quad (3.16)$$

$$\sigma_{ij}^{(0)} = -\frac{\zeta}{(1+\nu)} \frac{\partial^2 V_3^{(0)}}{\partial \xi_i \partial \xi_j} + \frac{1}{2(1+\nu)} \left(\frac{\partial V_i^{(0)}}{\partial \xi_j} + \frac{\partial V_j^{(0)}}{\partial \xi_i} \right). \quad (3.17)$$

Next, insert the latter equations into (3.5) and integrate across the thickness in ζ , taking into account the boundary conditions (3.11). The result is

$$\frac{\partial^2 V_i^{(0)}}{\partial \xi_i^2} + \frac{1+\nu}{2} \frac{\partial^2 V_j^{(0)}}{\partial \xi_i \partial \xi_j} + \frac{1-\nu}{2} \frac{\partial^2 V_i^{(0)}}{\partial \xi_j^2} = 0. \quad (3.18)$$

The last formulae correspond to static plane stress problem which is separated from the dynamic bending problem of interest.

We also have, from (3.5), the expression

$$\sigma_{3i}^{(0)} = \frac{\zeta^2 - 1}{2(1-\nu^2)} \left(\frac{\partial^3 V_3^{(0)}}{\partial \xi_i^3} + \frac{\partial^3 V_3^{(0)}}{\partial \xi_i \partial \xi_j^2} \right) \quad (3.19)$$

satisfying the homogeneous boundary conditions (3.11).

Equation (3.6) at leading order takes the form

$$\frac{\partial \sigma_{33}^{(0)}}{\partial \zeta} = - \left(\frac{\partial \sigma_{3i}^{(0)}}{\partial \xi_i} + \frac{\partial \sigma_{3j}^{(0)}}{\partial \xi_j} \right) + \frac{1}{2(1+\nu)} \frac{\partial^2 V_3^{(0)}}{\partial \tau^2}.$$

On account of (3.19), it becomes

$$\frac{\partial \sigma_{33}^{(0)}}{\partial \zeta} = - \frac{\zeta^2 - 1}{2(1-\nu^2)} \Delta^2 V_3^{(0)} + \frac{1}{2(1+\nu)} \frac{\partial^2 V_3^{(0)}}{\partial \tau^2}. \quad (3.20)$$

Integrating the latter through the thickness, and taking into account the inhomogeneous boundary conditions (3.12), we arrive at the sought for 2D equation

$$\frac{2}{3(1-\nu)} \Delta^2 V_3^{(0)} + \frac{1}{2} V_3^{(0)} + \frac{\partial^2 V_3^{(0)}}{\partial \tau^2} = (1+\nu) P^*. \quad (3.21)$$

In the original variables, the latter may be written as

$$D \Delta^2 w + 2\rho h \frac{\partial^2 w}{\partial t^2} + \theta w = P \quad (3.22)$$

where $w = hV_3^{(0)}$, $\Delta^2 = \partial^4 / \partial \alpha_1^4 + 2\partial^4 / \partial \alpha_1^2 \partial \alpha_2^2 + \partial^4 / \partial \alpha_2^4$ and the bending rigidity is given by

$$D = \frac{2Eh^3}{3(1-\nu^2)}. \quad (3.23)$$

The derived leading order equation coincides with the traditional engineering setup associated with the vibrations of a Kirchhoff plate supported by a Winkler foundation, e.g., see, Wang et al. (2005) and references therein.

4. Near cut-off behaviour

Taking the solution to equation (3.21) in the form of a plane travelling wave $w = We^{i(k\alpha_1 - \omega t)}$ where k and ω are the wavenumber and frequency, respectively, we arrive at the dispersion relation

$$\Omega^2 - \frac{1}{2} = \frac{2}{3(1-\nu)} \varepsilon^2 K^4 \quad (4.1)$$

where

$$K = \frac{kh}{\varepsilon}, \quad \Omega = \frac{\omega h}{c_2 \varepsilon}. \quad (4.2)$$

The original scaling in the previous section corresponding to bending vibration is based on the assumption $T \sim h/c_2 \varepsilon$ for which $\Omega \sim \varepsilon K^2$. This assumption is violated near the cut-off frequency $\Omega = 1/\sqrt{2}$. This motivates to look for an alternative scaling. For the sake of simplicity, we assume below that $|\Omega^2 - 1/2| \sim \varepsilon^2$. We also restrict ourselves to the domain $K \sim 1$. In this case, however, we cannot rely on the previous scaling obtained under the assumption $K \sim \varepsilon^{-1/2}$ at $\Omega \sim 1$.

Thus, we are aiming at establishing a 2D near cut-off formulation supporting a two-term asymptotic behaviour in the form

$$\Omega^2 = 1/2 + \varepsilon^2 P(K) \quad (4.3)$$

where $P(K)$ is a function to be determined. In doing so, due to the reasoning above, we should not expect to obtain $P(K) = 2K^4/(3(1-\nu))$ according to (4.1).

Let us, now, introduce the nondimensional variables

$$\alpha_i = \frac{h}{\varepsilon} \xi_i, \quad \alpha_3 = h \zeta, \quad t = \frac{h}{c_2 \varepsilon} \tau \quad (4.4)$$

in the 3D equations of motion (2.1)–(2.6) and boundary conditions (2.7)–(2.8) and also dimensionalize the sought for displacements and stresses as well as the external load by

$$v_i = h \varepsilon v_i^*, \quad v_3 = h v_3^*, \quad (4.5)$$

$$\sigma_{ii} = E \varepsilon^2 \sigma_{ii}^*, \quad \sigma_{ij} = E \varepsilon^2 \sigma_{ij}^*, \quad \sigma_{3i} = E \varepsilon^3 \sigma_{3i}^*, \quad \sigma_{33} = E \varepsilon^2 \sigma_{33}^*, \quad (4.6)$$

and

$$P = E \varepsilon^4 P^* \quad (4.7)$$

where, as usual, the starred quantities are assumed of order unity. The near cut-off scaling given by formulae (4.4)–(4.7) is inspired by asymptotic analysis of the dispersion relation for the problem in question presented in Erbaş et al. (2018).

On employing the scaled coordinates (4.4) together with nondimensional quantities (4.5)–(4.6), we may rewrite equations of motion (2.1)–(2.2) and the stress-displacement relations (2.3)–(2.6) as

$$\frac{\partial \sigma_{3i}^*}{\partial \zeta} = - \left(\frac{\partial \sigma_{ii}^*}{\partial \xi_i} + \frac{\partial \sigma_{ij}^*}{\partial \xi_j} \right) + \frac{\varepsilon^2}{2(1+\nu)} e_i^* - \frac{1}{4(1+\nu)} v_i^* \quad (4.8)$$

$$\frac{\partial \sigma_{33}^*}{\partial \zeta} = -\varepsilon^2 \left(\frac{\partial \sigma_{3i}^*}{\partial \xi_i} + \frac{\partial \sigma_{3j}^*}{\partial \xi_j} \right) + \frac{\varepsilon^2}{2(1+\nu)} e_3^* - \frac{1}{4(1+\nu)} v_3^* \quad (4.9)$$

where

$$e_k^* = \frac{1}{\varepsilon^2} \left(\frac{\partial^2 v_k^*}{\partial \tau^2} + \frac{1}{2} v_k^* \right), \quad k = 1, 2, 3 \quad (4.10)$$

and

$$\sigma_{ii}^* = \frac{1}{1 - \nu^2} \left(\frac{\partial v_i^*}{\partial \xi_i} + \nu \frac{\partial v_j^*}{\partial \xi_j} \right) + \frac{\nu}{1 - \nu} \sigma_{33}^* \quad (4.11)$$

$$\sigma_{ij}^* = \frac{1}{2(1 + \nu)} \left(\frac{\partial v_i^*}{\partial \xi_j} + \frac{\partial v_j^*}{\partial \xi_i} \right), \quad (4.12)$$

$$\frac{\partial v_i^*}{\partial \zeta} = -\frac{\partial v_3^*}{\partial \xi_i} + 2\varepsilon^2(1 + \nu)\sigma_{3i}^*, \quad (4.13)$$

$$\frac{\partial v_3^*}{\partial \zeta} = \varepsilon^2 [\sigma_{33}^* - \nu(\sigma_{ii}^* + \sigma_{jj}^*)]. \quad (4.14)$$

The boundary conditions (2.7)–(2.8) become

$$\sigma_{3i}^* \Big|_{\zeta=\pm 1} = 0, \quad (4.15)$$

$$\sigma_{33}^* \Big|_{\zeta=1} = \varepsilon^2 P^*, \quad \sigma_{33}^* \Big|_{\zeta=-1} = \frac{1}{2(1 + \nu)} v_3^*. \quad (4.16)$$

The starred unknown quantities will now have a different expansion than (3.13) and is given by

$$f^* = f^{(0)} + \varepsilon^2 f^{(1)} + \varepsilon^4 f^{(2)} + \dots \quad (4.17)$$

First, equations (4.14) and (4.13) at leading order result in the same as above displacement components given, respectively, by (3.14) and (3.15). Then, from equation (4.9), we write down the solvability condition in the form

$$\int_{-1}^1 \frac{\partial \sigma_{33}^{(0)}}{\partial \zeta} d\zeta = -\frac{1}{4(1 + \nu)} \int_{-1}^1 v_3^{(0)} d\zeta \quad (4.18)$$

which is satisfied identically due to boundary conditions (4.16) taken at leading order. It also follows from (4.9), taking into account (4.18), that

$$\sigma_{33}^{(0)} = \frac{1 - \zeta}{4(1 + \nu)} V_3^{(0)}. \quad (4.19)$$

We continue by inserting (3.15) and (4.19) into (4.11) and (4.12) to obtain, respectively,

$$\begin{aligned} \sigma_{ii}^{(0)} = & -\frac{\zeta}{1 - \nu^2} \left(\frac{\partial^2 V_3^{(0)}}{\partial \xi_i^2} + \nu \frac{\partial V_3^{(0)}}{\partial \xi_j^2} \right) + \frac{1}{1 - \nu^2} \left(\frac{\partial V_i^{(0)}}{\partial \xi_i} + \nu \frac{\partial V_j^{(0)}}{\partial \xi_j} \right) \\ & + \frac{(1 - \zeta)\nu}{4(1 - \nu^2)} V_3^{(0)} \end{aligned} \quad (4.20)$$

and

$$\sigma_{ij}^{(0)} = -\frac{\zeta}{1+\nu} \frac{\partial^2 V_3^{(0)}}{\partial \xi_i \partial \xi_j} + \frac{1}{2(1+\nu)} \left(\frac{\partial V_i^{(0)}}{\partial \xi_j} + \frac{\partial V_j^{(0)}}{\partial \xi_i} \right). \quad (4.21)$$

Next, we obtain the solvability condition for the leading order equation following from (4.8) which is written as

$$\int_{-1}^1 \frac{\partial \sigma_{3i}^{(0)}}{\partial \zeta} d\zeta = - \int_{-1}^1 \left(\frac{\partial \sigma_{ii}^{(0)}}{\partial \xi_i} + \frac{\partial \sigma_{ij}^{(0)}}{\partial \xi_j} + \frac{1}{4(1+\nu)} v_i^{(0)} \right) d\zeta. \quad (4.22)$$

After substituting (4.20), (4.21) and (3.15) in the latter and satisfying the homogeneous boundary conditions along the faces, see (4.15), we get

$$-\frac{\nu}{4} \frac{\partial V_3^{(0)}}{\partial \xi_i} = \frac{\partial^2 V_i^{(0)}}{\partial \xi_i^2} + \frac{1+\nu}{2} \frac{\partial^2 V_j^{(0)}}{\partial \xi_i \partial \xi_j} + \frac{1-\nu}{2} \frac{\partial^2 V_i^{(0)}}{\partial \xi_j^2} + \frac{1-\nu}{4} V_i^{(0)}. \quad (4.23)$$

It also follows from (4.8) that

$$\begin{aligned} \sigma_{3i}^{(0)} &= \frac{\zeta^2 - 1}{2(1-\nu^2)} \left(\frac{\partial^3 V_3^{(0)}}{\partial \xi_i^3} + \frac{\partial^3 V_3^{(0)}}{\partial \xi_i \partial \xi_j^2} \right) + \frac{\zeta^2 - 2\nu\zeta - (1-2\nu)}{8(1-\nu^2)} \frac{\partial V_3^{(0)}}{\partial \xi_i} - \\ &- \frac{\zeta - 1}{1-\nu^2} \left(\frac{\partial^2 V_i^{(0)}}{\partial \xi_i^2} + \frac{1+\nu}{2} \frac{\partial^2 V_j^{(0)}}{\partial \xi_i \partial \xi_j} + \frac{1-\nu}{2} \frac{\partial^2 V_i^{(0)}}{\partial \xi_j^2} \right) - \frac{\zeta - 1}{4(1+\nu)} V_i^{(0)}. \end{aligned} \quad (4.24)$$

Now, we have from (4.14), at first order,

$$\frac{\partial v_3^{(1)}}{\partial \zeta} = \sigma_{33}^{(0)} - \nu \left(\sigma_{ii}^{(0)} + \sigma_{jj}^{(0)} \right).$$

Then, inserting the stresses from (4.19) and (4.20) into the right hand side of the last formula and integrating with respect to ζ , we obtain

$$v_3^{(1)} = \frac{\zeta^2 \nu}{2(1-\nu)} \Delta V_3^{(0)} - \frac{(\zeta^2 - 2\zeta)(1-2\nu)}{8(1-\nu)} V_3^{(0)} - \frac{\nu\zeta}{1-\nu} \left(\frac{\partial V_i^{(0)}}{\partial \xi_i} + \frac{\partial V_j^{(0)}}{\partial \xi_j} \right) + V_3^{(1)}. \quad (4.25)$$

Similarly, we deduce from (4.9) at first order that

$$\int_{-1}^1 \frac{\partial \sigma_{33}^{(1)}}{\partial \zeta} d\zeta = - \int_{-1}^1 \left(\frac{\partial \sigma_{3i}^{(0)}}{\partial \xi_i} + \frac{\partial \sigma_{3j}^{(0)}}{\partial \xi_j} \right) d\zeta + \frac{1}{2(1+\nu)} \int_{-1}^1 e_3^{(0)} d\zeta - \frac{1}{4(1+\nu)} \int_{-1}^1 v_3^{(1)} d\zeta. \quad (4.26)$$

Then, taking into account formulae (4.24) and (4.25) along with the boundary conditions (4.16), we

arrive at

$$\begin{aligned}
e_3^{(0)} = & -\frac{2}{3(1-\nu)}\Delta^2 V_3^{(0)} - \frac{1-2\nu}{6(1-\nu)}\Delta V_3^{(0)} + \frac{1-2\nu}{6(1-\nu)}V_3^{(0)} \\
& + \frac{2}{1-\nu} \left(\frac{\partial^3 V_i^{(0)}}{\partial \xi_i^3} + \frac{\partial^3 V_j^{(0)}}{\partial \xi_i^2 \partial \xi_j} + \frac{\partial^3 V_i^{(0)}}{\partial \xi_i \partial \xi_j^2} + \frac{\partial^3 V_j^{(0)}}{\partial \xi_j^3} \right) \\
& + \frac{1-2\nu}{2(1-\nu)} \left(\frac{\partial V_i^{(0)}}{\partial \xi_i} + \frac{\partial V_j^{(0)}}{\partial \xi_j} \right) + (1+\nu)P^*
\end{aligned} \tag{4.27}$$

leading to

$$\begin{aligned}
\sigma_{33}^{(1)} = & -\frac{\zeta^3 - 3\zeta + 2}{6(1-\nu^2)}\Delta^2 V_3^{(0)} - \frac{\zeta^3(1+\nu) - 3\nu\zeta^2 - 3\zeta(1-2\nu) + 2(1-2\nu)}{24(1-\nu^2)}\Delta V_3^{(0)} \\
& + \frac{\zeta - 1}{2(1+\nu)}e_3^{(0)} - \frac{(\zeta^3 - 3\zeta + 2)(1-2\nu)}{96(1-\nu^2)}V_3^{(0)} - \frac{\zeta - 1}{4(1+\nu)}V_3^{(1)} \\
& + \frac{(\zeta - 1)^2}{2(1-\nu^2)} \left(\frac{\partial^3 V_i^{(0)}}{\partial \xi_i^3} + \frac{\partial^3 V_j^{(0)}}{\partial \xi_i^2 \partial \xi_j} + \frac{\partial^3 V_i^{(0)}}{\partial \xi_i \partial \xi_j^2} + \frac{\partial^3 V_j^{(0)}}{\partial \xi_j^3} \right) \\
& + \frac{\zeta^2 - 2\zeta(1-\nu) + (1-2\nu)}{8(1-\nu^2)} \left(\frac{\partial V_i^{(0)}}{\partial \xi_i} + \frac{\partial V_j^{(0)}}{\partial \xi_j} \right) + P^*.
\end{aligned} \tag{4.28}$$

Finally, expressing the left hand side in (4.27) in terms of $V_3^{(0)}$ we have

$$\begin{aligned}
\frac{\partial^2 V_3^{(0)}}{\partial \tau^2} + \frac{1}{2}V_3^{(0)} = & \varepsilon^2 \left(-\frac{2}{3(1-\nu)}\Delta^2 V_3^{(0)} - \frac{1-2\nu}{6(1-\nu)}\Delta V_3^{(0)} + \frac{1-2\nu}{6(1-\nu)}V_3^{(0)} + \right. \\
& + \frac{2}{1-\nu} \left(\frac{\partial^3 V_i^{(0)}}{\partial \xi_i^3} + \frac{\partial^3 V_j^{(0)}}{\partial \xi_i^2 \partial \xi_j} + \frac{\partial^3 V_i^{(0)}}{\partial \xi_i \partial \xi_j^2} + \frac{\partial^3 V_j^{(0)}}{\partial \xi_j^3} \right) \\
& \left. + \frac{1-2\nu}{2(1-\nu)} \left(\frac{\partial V_i^{(0)}}{\partial \xi_i} + \frac{\partial V_j^{(0)}}{\partial \xi_j} \right) + (1+\nu)P^* \right).
\end{aligned} \tag{4.29}$$

5. Discussion

Let us present the equations of motion derived in the previous section in terms of the sought for mid-plane displacements presented in the form $u_i = h\varepsilon \left(V_i^{(0)} + \varepsilon^2 V_i^{(1)} \right)$ and $w = h \left(V_3^{(0)} + \varepsilon^2 V_3^{(1)} \right)$. In terms of the original variables equations (4.23) and (4.29) respectively become

$$-\frac{\nu\theta}{2E} \text{grad } w = \frac{1-\nu}{2(1+\nu)}\Delta \mathbf{u} + \frac{1}{2} \text{grad div } \mathbf{u} + \frac{(1-\nu)\theta}{2Eh} \mathbf{u} \tag{5.1}$$

and

$$\begin{aligned} \frac{2Eh^3}{3(1-\nu^2)}\Delta^2 w + \frac{1-2\nu}{3(1-\nu)}\theta h^2 \Delta w + 2\rho h \frac{\partial^2 w}{\partial t^2} + \theta \left(1 - \frac{2(1+\nu)(1-2\nu)}{3(1-\nu)} \frac{\theta h}{E}\right) w \\ - \frac{2Eh^2}{1-\nu^2} \Delta \operatorname{div} \mathbf{u} - \frac{1-2\nu}{1-\nu} \theta h \operatorname{div} \mathbf{u} = P \end{aligned} \quad (5.2)$$

where $\mathbf{u} = (u_1, u_2)$ and all the 2D operators are specified on the mid-plane.

In the one-dimensional case ($u_2 = 0, \partial/\partial\alpha_2 = 0$) equation (5.1) and (5.2) become

$$\frac{\nu(1+\nu)\theta}{2E} \frac{\partial w}{\partial \alpha_1} = - \left(\frac{(1-\nu^2)\theta}{2Eh} + \frac{\partial^2}{\partial \alpha_1^2} \right) u_1 \quad (5.3)$$

and

$$\begin{aligned} \frac{2Eh^3}{3(1-\nu^2)} \frac{\partial^4 w}{\partial \alpha_1^4} + \frac{1-2\nu}{3(1-\nu)} \theta h^2 \frac{\partial^2 w}{\partial \alpha_1^2} + 2\rho h \frac{\partial^2 w}{\partial t^2} + \theta \left(1 - \frac{2(1+\nu)(1-2\nu)}{3(1-\nu)} \frac{\theta h}{E}\right) w \\ - \frac{2Eh^2}{1-\nu^2} \frac{\partial^3 u_1}{\partial \alpha_1^3} - \frac{1-2\nu}{1-\nu} \theta h \frac{\partial u_1}{\partial \alpha_1} = P \end{aligned} \quad (5.4)$$

Let us now apply the operator $(h^2/\varepsilon^2)\partial^2/\partial\alpha_1^2 + (1-\nu)/4$ to equation (5.4). Then, expressing the displacement u_1 through (5.3), we arrive at

$$\begin{aligned} \frac{4Eh^3}{3(1-\nu^2)} \left(1 + \frac{Eh}{(1+\nu)\theta} \frac{\partial^2}{\partial \alpha_1^2}\right) \frac{\partial^4 w}{\partial \alpha_1^4} + \left(\frac{2Eh}{1+\nu} - \frac{(1-2\nu)(3-2\nu)}{3(1-\nu)} \theta h^2\right) \frac{\partial^2 w}{\partial \alpha_1^2} \\ + (1-\nu)\theta \left(1 - \frac{2(1+\nu)(1-2\nu)}{3(1-\nu)} \frac{\theta h}{E}\right) w + 2\rho h(1-\nu) \left(1 + \frac{2Eh}{(1-\nu^2)\theta} \frac{\partial^2}{\partial \alpha_1^2}\right) \frac{\partial^2 w}{\partial t^2} \\ = (1-\nu) \left(1 + \frac{2Eh}{(1-\nu^2)\theta} \frac{\partial^2}{\partial \alpha_1^2}\right) P. \end{aligned} \quad (5.5)$$

We derive the dispersion relation for the homogeneous equation (5.5) ($P = 0$) setting $w = e^{i(k\alpha_1 - \omega t)}$, which results in

$$\left(\Omega^2 - \frac{1}{2}\right) \left(K^2 - \frac{1-\nu}{4}\right) = \frac{2}{3(1-\nu)} \varepsilon^2 \left(K^6 - \frac{1}{2}K^4 - \frac{(1-2\nu)(3-2\nu)}{16}K^2 + \frac{(1-\nu)(1-2\nu)}{16}\right) \quad (5.6)$$

where Ω and K are same as above in equation (4.2). Remark that the last formula is a near cut-off shortened form of a more general dispersion relation presented in Erbaş et al. (2018).

This formula gives

$$P(K) = \frac{1}{24(1-\nu)} \frac{16K^6 - 8K^4 - (1-2\nu)(3-2\nu)K^2 + (1-\nu)(1-2\nu)}{K^2 - (1-\nu)/4} \quad (5.7)$$

in the near cut-off expansion (4.3). It is remarkable that due to the pole $K = \sqrt{1-\nu}/2$, asymptotic behaviour (4.3) appears to be nonuniform in K . The reason is the veering of bending and extension

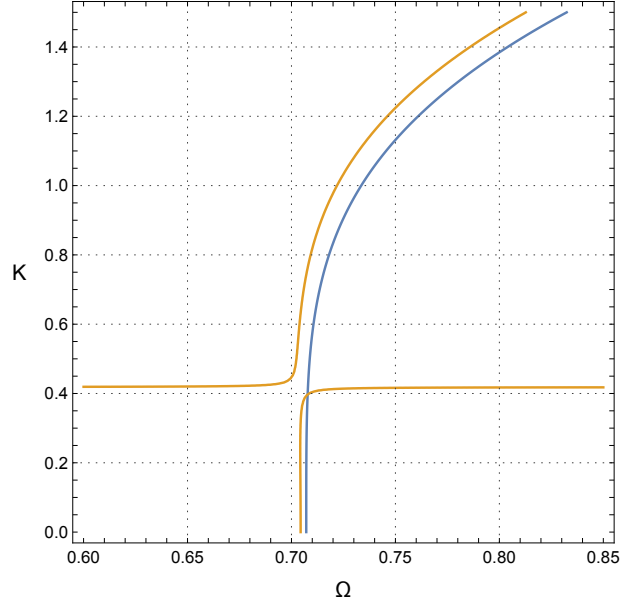


FIG. 2. Comparison of the conventional dispersion relation (4.1) (blue line) against the near cut-off one (5.6) (orange line) with $\varepsilon = 0.2$ and $\nu = 0.3$.

dispersion curves at the point $\Omega = 1/\sqrt{2}$ and $K = \sqrt{1-\nu}/2$, for which $K = \sqrt{(1-\nu)/2} \Omega$, see Erbaş et al. (2018), and also Mace & Manconi (2012) for greater detail.

Over a narrow vicinity of the veering point, the dispersion relation (5.6) may formally be reduced to a simpler form given by

$$\left(\Omega^2 - \frac{1}{2}\right) \left(K^2 - \frac{1-\nu}{4}\right) = -\frac{1}{32} \varepsilon^2 \nu^2 \quad (5.8)$$

We also note that at $K \gg 1$, the asymptotic behaviours of (5.6) and the traditional dispersion relation of a beam on a Winkler foundation, see (4.1), coincide. On the other hand, at $K \ll 1$ we derive from (5.6) at leading order $\Omega^2 = 1/2 - \frac{(1-2\nu)}{3(1-\nu)} \varepsilon^2$. This gives $O(\varepsilon^2)$ correction to the cut-off value $\Omega^2 = 1/2$ predicted by traditional theory, see (4.1).

6. Concluding Remarks

It is shown that outside the vicinity of the cut-off frequency $\Omega \approx 1/\sqrt{2}$ in Section 4, the traditional model of a Kirchhoff plate resting on a Winkler foundation has an asymptotic justification. The adapted scaling, see (3.1)–(3.4), is identical to that for bending vibrations of a plate with traction-free faces in Kaplunov et al. (1998). Obviously, this scaling is also characteristic of high order approximations similar to those in Erbaş et al. (2021), however, the latter are out of the scope of this paper.

An alternative approximation, (5.1) and (5.2), governing a near cut-off behaviour can hardly be deduced using physical hypothesis, outside the asymptotic framework; see also the scalar one dimen-

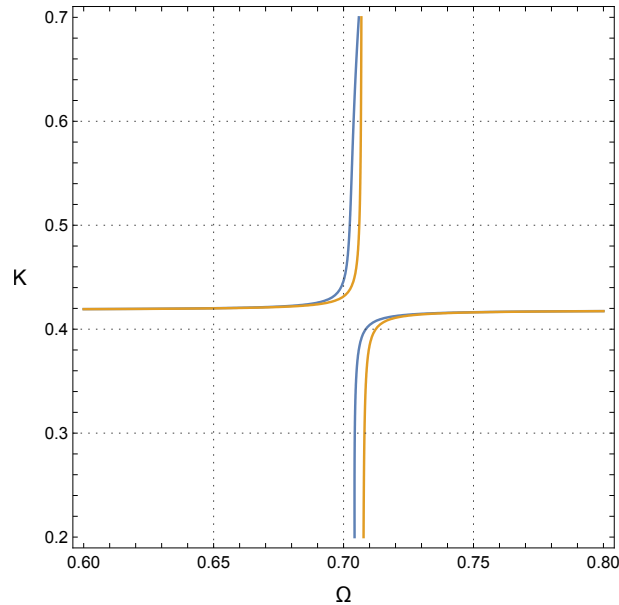


FIG. 3. Comparison of the dispersion relation (5.6) against its approximation around $K = \sqrt{1 - \nu}/2$ with $\varepsilon = 0.2$ and $\nu = 0.3$.

sional equation (5.5). It accommodates a nontrivial interaction of bending and extension motions including veering of the associated dispersion curves, see also Erbaş et al. (2018).

The asymptotic near cut-off dispersion relation takes the form of a fraction, see (4.3) and (5.7), instead of a polynomial typical of a plate with free or fixed faces, e.g., see Kaplunov et al. (1998) and also Rogerson et al. (2007), Lashhab et al. (2015). In this case, the pole $K = \sqrt{1 - \nu}/2$ leads to a nonuniform behaviour.

It might be expected that due to the presence of a foundation a plate with thickness imperfections should support low-frequency trapped modes in the vicinity of the aforementioned cut-off frequency. Until now, the focus has been on high-frequency trapping in thin elastic structures with free or fixed faces, see Tovstik (1992), Gridin et al. (2005), Kaplunov et al. (2005), Postnova & Craster (2008).

REFERENCES

- Aghalovyan, L. A. (2015) *Asymptotic theory of anisotropic plates and shells*. World Scientific, Singapore.
- Auersch, L. (2008) Dynamic interaction of various beams with the underlying soil—finite and infinite, half-space and Winkler models. *European Journal of Mechanics-A/Solids*, **27**(5), 933–958.
- Chen, J.-S. & Chen, Y.-K. (2011) Steady state and stability of a beam on a damped tensionless foundation under a moving load. *International Journal of Non-Linear Mechanics*, **46**(1), 180–185.
- Chien, R.-D. & Chen, C.-S. (2006) Nonlinear vibration of laminated plates on an elastic foundation. *Thin-walled structures*, **44**(8), 852–860.
- Ciarlet, P. G. (1990) *Plates and junctions in elastic multi-structures: an asymptotic analysis*, volume 14. Springer Verlag.
- Dillard, D. A., Mukherjee, B., Karnal, P., Batra, R. C. & Frechette, J. (2018) A review of Winkler’s foundation and its profound influence on adhesion and soft matter applications. *Soft matter*, **14**(19), 3669–3683.
- Dumir, P. (1988) Nonlinear dynamic response of isotropic thin rectangular plates on elastic foundations. *Acta*

- mechanica*, **71**(1), 233–244.
- Erbaş, B., Kaplunov, J. & Elishakoff, I. (2021) Asymptotic derivation of a refined equation for an elastic beam resting on a Winkler foundation. *Mathematics and Mechanics of Solids*, page 10812865211023885.
- Erbaş, B., Kaplunov, J., Nobili, A. & Kılıç, G. (2018) Dispersion of elastic waves in a layer interacting with a Winkler foundation. *The Journal of the Acoustical Society of America*, **144**(5), 2918–2925.
- Froio, D., Rizzi, E., Simões, F. M. & Da Costa, A. P. (2018) Universal analytical solution of the steady-state response of an infinite beam on a Pasternak elastic foundation under moving load. *International Journal of Solids and Structures*, **132**, 245–263.
- Ghannadiasl, A. & Mofid, M. (2015) An analytical solution for free vibration of elastically restrained Timoshenko beam on an arbitrary variable Winkler foundation and under axial load. *Latin American Journal of Solids and Structures*, **12**(13), 2417–2438.
- Goldenevizer, A. L. (1976) *Theory of thin elastic shells*. Izdatelstvo Nauka, In Russian, Moscow.
- Gridin, D., Craster, R. V. & Adamou, A. T. (2005) Trapped modes in curved elastic plates. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences*, **461**(2056), 1181–1197.
- Kaplunov, J., Kossovitch, L. Y. & Nolde, E. (1998) *Dynamics of thin walled elastic bodies*. Academic Press.
- Kaplunov, J., Manevitch, L. & Smirnov, V. (2016) Vibrations of an elastic cylindrical shell near the lowest cut-off frequency. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences*, **472**(2189), 20150753.
- Kaplunov, J. & Nobili, A. (2017) A robust approach for analysing dispersion of elastic waves in an orthotropic cylindrical shell. *Journal of Sound and Vibration*, **401**, 23–35.
- Kaplunov, J., Prikazchikov, D. & Sultanova, L. (2018) Justification and refinement of Winkler–Fuss hypothesis. *Zeitschrift für angewandte Mathematik und Physik*, **69**(3), 1–15.
- Kaplunov, J., Rogerson, G. & Tovstik, P. (2005) Localized vibration in elastic structures with slowly varying thickness. *The Quarterly Journal of Mechanics and Applied Mathematics*, **58**(4), 645–664.
- Kossovich, L. Y. (1986) *Nonstationary Problems of Theory of Elastic Thin Shells*. .
- Kudish, I. I., Volkov, S. S., Vasiliev, A. S. & Aizikovich, S. M. (2021) Characterization of the behavior of different contacts with double coating. *Mathematics and Mechanics of Complex Systems*, **9**(2), 179–202.
- Kuznetsov, V. I. (1952) *Elastic Foundations*. Gosstroizdat, Moscow.
- Lashhab, M., Rogerson, G. & Prikazchikova, L. (2015) Small amplitude waves in a pre-stressed compressible elastic layer with one fixed and one free face. *Zeitschrift für angewandte Mathematik und Physik*, **66**(5), 2741–2757.
- Le, K. C. (2012) *Vibrations of shells and rods*. Springer Science & Business Media.
- Mace, B. R. & Manconi, E. (2012) Wave motion and dispersion phenomena: Veering, locking and strong coupling effects. *The Journal of the Acoustical Society of America*, **131**(2), 1015–1028.
- Metrikine, A. (2004) Steady state response of an infinite string on a non-linear visco-elastic foundation to moving point loads. *Journal of Sound and Vibration*, **272**(3-5), 1033–1046.
- Postnova, J. & Craster, R. V. (2008) Trapped modes in elastic plates, ocean and quantum waveguides. *Wave Motion*, **45**(4), 565–579.
- Rogerson, G. A., Sandiford, K. J. & Prikazchikova, L. A. (2007) Abnormal long wave dispersion phenomena in a slightly compressible elastic plate with non-classical boundary conditions. *International Journal of Non-Linear Mechanics*, **42**(2), 298–309.
- Strozzi, M., Manevitch, L. I., Pellicano, F., Smirnov, V. V. & Shepelev, D. S. (2014) Low-frequency linear vibrations of single-walled carbon nanotubes: Analytical and numerical models. *Journal of Sound and Vibration*, **333**(13), 2936–2957.
- Tanahashi, H. (2004) Formulas for an infinitely long Bernoulli-Euler beam on the Pasternak model. *Soils and foundations*, **44**(5), 109–118.
- Tovstik, P. (1992) Free high-frequency vibrations of anisotropic plates of variable thickness. *Journal of Applied Mathematics and Mechanics*, **56**(3), 390–395.
- Wang, Y., Tham, L. & Cheung, Y. (2005) Beams and plates on elastic foundations: a review. *Progress in Structural*

Engineering and Materials, **7**(4), 174–182.

Winkler, E. (1867) *Die Lehre von der Elastizität und Festigkeit*. Praha, Dominicus.

Younesian, D., Hosseinkhani, A., Askari, H. & Esmailzadeh, E. (2019) Elastic and viscoelastic foundations: a review on linear and nonlinear vibration modeling and applications. *Nonlinear Dynamics*, **97**(1), 853–895.

Zhang, Y. & Liu, X. (2019) Response of an infinite beam resting on the tensionless Winkler foundation subjected to an axial and a transverse concentrated loads. *European Journal of Mechanics-A/Solids*, **77**, 103819.